

HF5420

SOLID STATE RELAY



File No.: E133481



File No.: R50058046



Features

- DC input-AC output for 1.2A load at 25°C
- 600V blocking voltage
- Photo isolation
- Zero cross or random turn-on
- Printed circuit board mount
- RoHS compliant

INPUT (TA = 25°C)

Control voltage range	05D	4 to 6VDC
	12D	9.6 to 14.4VDC
	24D	19.2 to 28.8VDC
Must operate voltage	05D	Max. 4VDC
	12D	Max. 9.6VDC
	24D	Max. 19.2VDC
Must release voltage		1.0VDC
Typical input current		15mA

OUTPUT

Load voltage range (at 47 to 63Hz)	75 to 240VAC	
Load current range	0.1 to 1.2A	
Max. surge current (10ms)	25A _{pk}	
Max. leakage current	0.1mA	
Max. on-state voltage drop	1.5VAC	
Max. turn-on time	Zero cross turn-on	10ms
	Random turn-on	1ms
Max. turn-off time	10ms	
Max. transient overvoltage	600V _{pk}	
Min. off-state dv/dt	200V/μs	
Max. zero-crossover voltage	±15V	
Min. power factor	0.5	

GENERAL


Dielectric strength (input to output)	2000VAC, 50/60Hz, 1min.	
Insulation resistance	1000MΩ (at 500VDC)	
Vibration durability	10 to 55HZ 1.5mm DA	
Shock durability	1000m/s ²	
Ambient temperature	Operating	-30°C to +85°C
	Storage	-30°C to +100°C
Ambient Humidity	45 to 85% RH	
Unit weight	Typ. 3.5g	

DESCRIPTION

This SPST-NO printed circuit board mount SIP SSR provides AC output switching in a high density package. The DC input is compatible with 5, 12 and 24V logic systems. The relays provide 2000VAC opto-isolation, between input and output. Encapsulation, thermally conductive epoxy.

PRECAUTIONS

1. Soldering must be completed within 10 seconds at 260 °C or less or within 5 seconds at 350 °C or less.
2. The SSR case serves to dissipate heat. Install the relays so that they are adequately ventilated. If poor ventilation is unavoidable, reduce the load current by half.
3. The input circuitry does not incorporate a circuit protecting the SSR from being damaged due to a reversed connection. So Make sure that the polarity is correct when connecting the input lines.
4. When using the HF5420 series for an AC load with a peak voltage of more than 450V, connect the load terminals of the relay to an inrush absorber (varistor). The recommended varistor voltage, 440 to 470V.
5. When using the HF5420 series in phase control applications, at a phase control angle close to 180 degrees the relay's input signal turn off at the trailing edge of the AC sine wave must be limited to end 200μs before AC zero cross. This assures that the relay has time to switch off. Shorter times may cause loss of control at the following half cycle.
6. Terminal arrangement

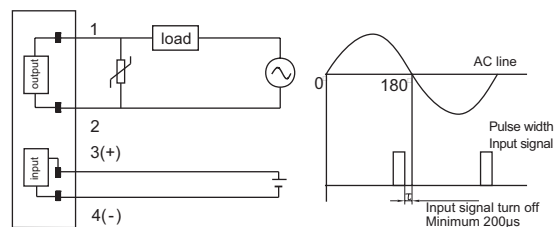

HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2006 Rev. 2.00


ORDERING INFORMATION

Type	HF5420 / 12 D 240 A 1.2 Z N XXX
Input voltage	05: 4 to 6V 12: 9.6 to 14.4V 24: 19.2 to 28.8V
Input voltage form	D: DC
Load voltage	240: 240V
Load voltage form	A: AC
Load current	1.2: 1.2A
Zero cross function	Z: Zero cross turn-on P: Random turn-on
RC inside	N: Without RC Inside
Special request code	(Only for special requirements, e.g. 555 stand for RoHS compliant)


Notes: HF5420 is an environmental friendly product, please mark special code (555) when order.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

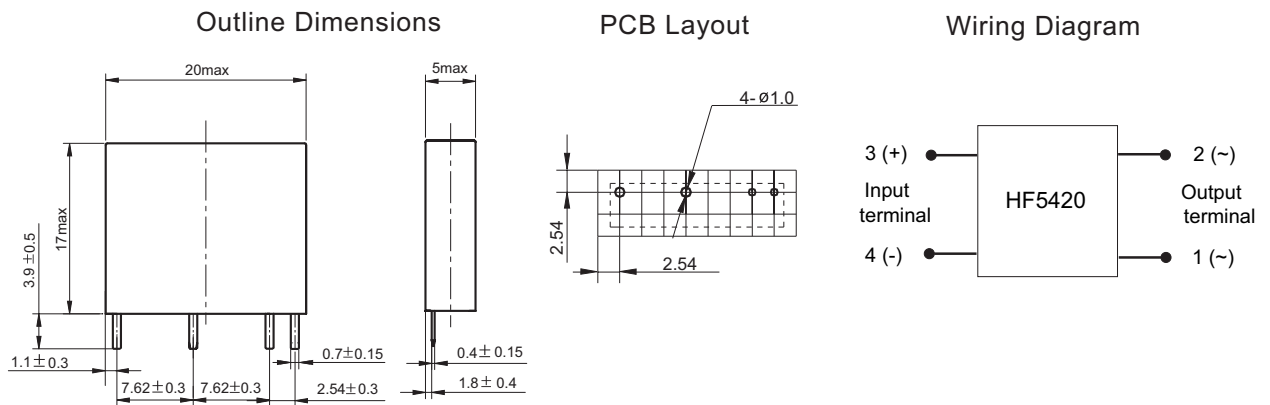

CHARACTERISTIC CURVE

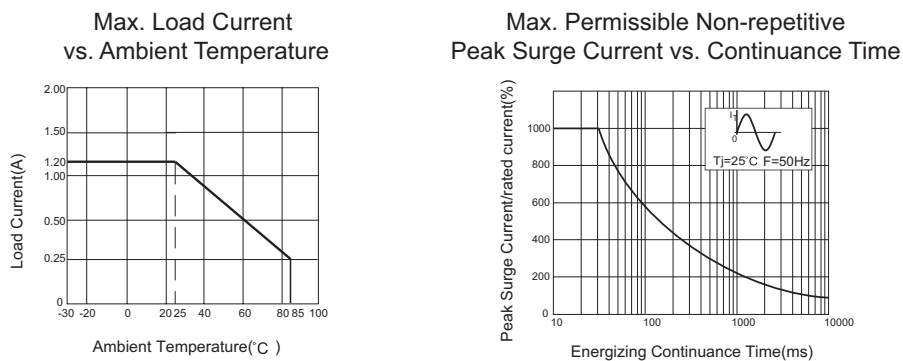

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© 2006 Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.